



Cable P090D-7909




Compatible Model: EB120, EB150, EB180, EB240

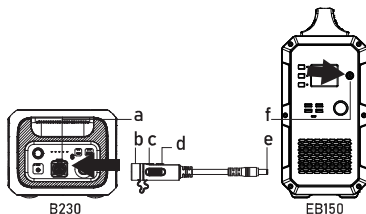


- Step 1: Long press the power button of B230 or B300 in 2 seconds to TURN IT OFF.
- Step 2: Press the switch(c) and fully plug pole(b) of Cable P090D-7909 into the battery port(a) of B230 or B300 battery pack.(b-a)
- Step 3: Push the switch(d) forward to lock the connection.
- Step 4: Plug the pole(e) into the 7090 Input Port(f) of power station.(e-f)
- Step 5: Long Press the power button of B230 or B300 over 5 seconds, and release after the LED indicator flashes.
- Step 6: Long press the power button of your power station to finish the connection.

P/N:17.0303.0410-01A1

HOW TO USE P090D-XT90



Compatible Model: AC200/P, AC200MAX, EB200/P, PS200A

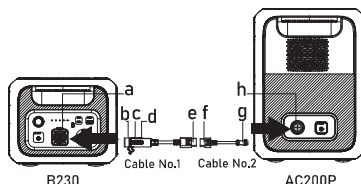


- Step 1: Long press the power button of B230 or B300 in 2 seconds to TURN IT OFF.
- Step 2: Press the switch(c) and fully plug pole(b) of Cable P090D-XT90 into the battery port(a) of B230 or B300 battery pack.(b-a)
- Step 3: Push the switch(d) forward to lock the connection.
- Step 4: Connect Cable No.1 with Cable No.2.(e-f)
- Step 5: Plug the pole(g) into the PV Input Port(h) of power station.(g-h)
- Step 6: Long Press the power button of B230 or B300 over 5 seconds, and release after the LED indicator flashes.




USER MANUAL

Please read this manual before use and follow its guidance.
Keep this manual for future reference.

HOW TO USE P090D-MC4




Compatible Model: EP500Pro, AC300

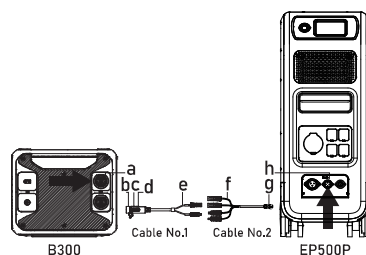


- Step 1: Long press the power button of B300 in 2 seconds to TURN IT OFF.

HOW TO QUIT THE CONNECTION

- Method 1: Long press the power button of B230 or B300 in 2 seconds to TURN IT OFF.
- Method 2: Push back the Switch(A) of the connected cable, press the Switch(B) and pull the cable out when the battery indicator of B230 or B300 stops flashing.




- Step 2: Press the switch(c) and fully plug pole(b) of Cable P090D-MC4 into the battery port(a) of B300 battery pack.(b-a)
- Step 3: Push the switch(d) forward to lock the connection.
- Step 4: Connect Cable No.1 with Cable No.2.(e-f)
- Step 5: Plug the pole(g) into the PV Input Port(h) of power station.(g-h)
- Step 6: Long Press the power button B300 over 5 seconds, and release after the LED indicator flashes.
- Step 7: Long press the power button of your power station to turn it ON.
- Step 8: Tap "Settings" on homepage to set the DC Input Source to "Others" to finish the connection.




EP500Pro


- Step 7: Long press the power button of your power station to turn it ON.
- Step 8: Tap "Settings" on homepage to set the xx Input Source to "PV" (for AC200/P,EB200) or "Others" (for PS200A, AC200MAX) to finish the connection.



PS200A



AC200MAX



AC200P