









FridgePower Backup System

Product Portfolio & Review Guide

2,016-8,064 Wh | 1,800W

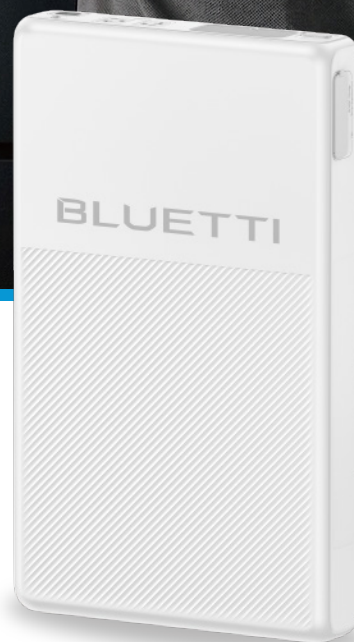

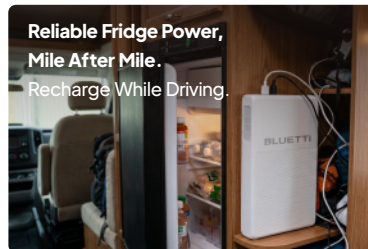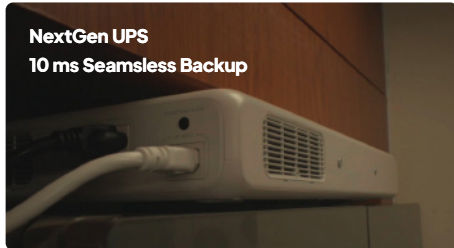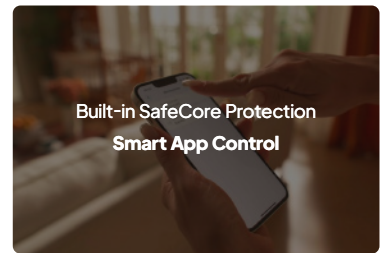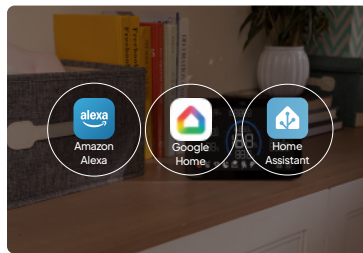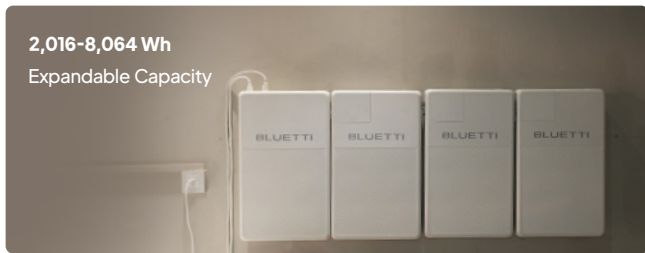

Ultra-Slim Design. Invisible Power.



At just 75 mm*, FridgePower is about the width of a smartphone, blending into your home like it's always meant to be there. Put it on top, tuck it in a cabinet, or hang it on a wall. Aesthetically pleasing in plain sight.

* 75 mm body (78 mm with foot pads)




Reliable RV Power, Mile After Mile.

Paired with Charger 2, FridgePower recharges while you drive and delivers dependable backup power for your RV fridge and essential devices. From long road trips to overnight stops, enjoy fresh food, steady power, and greater peace of mind wherever your journey takes you.

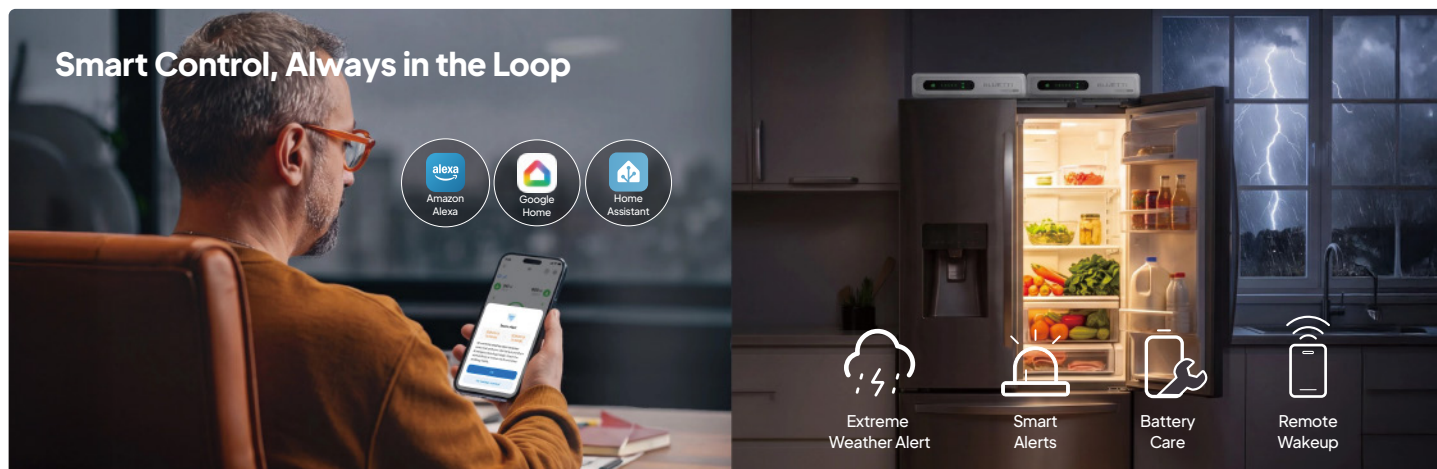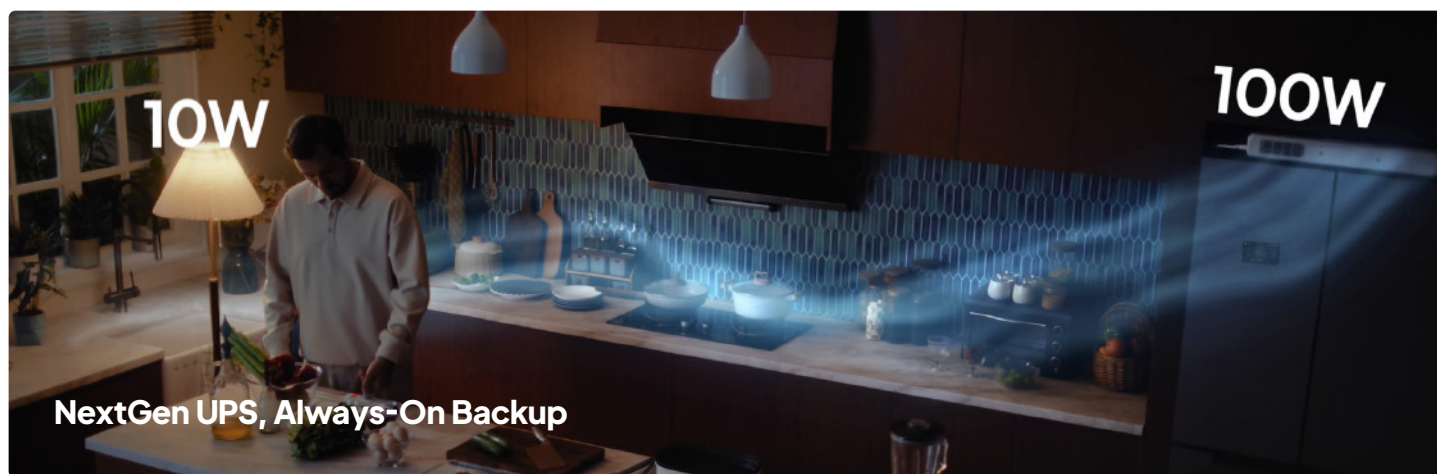


Multiple Ways to Recharge

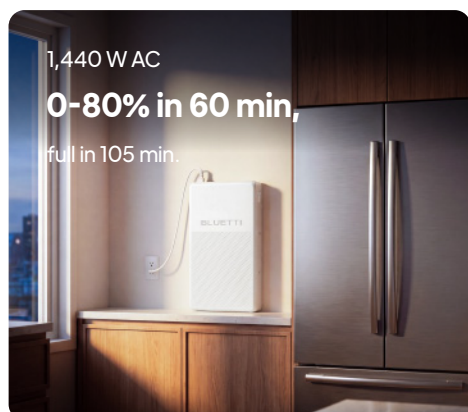

Take a Closer Look.


1 All the Details, at a Glance.

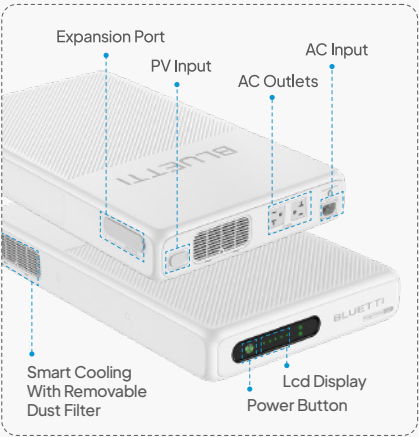

2 Unibody Design. Ultra-Slim Profile.



3 Ready to Install.

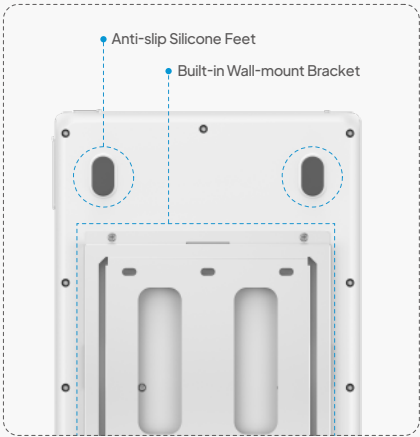

Specifications



FridgePower

Battery Capacity	2,016 Wh
Battery Type	LiFePO ₄
Weight	About 19.7 kg/43.43 lbs
Dimensions (L × W × H)*	580 × 350 × 75 mm* / 22.83 × 13.78 × 2.95 in
Charging Temperature	0°C to 40°C / 32°F to 104°F
Discharging Temperature	-20°C to 40°C / -4°F to 104°F
AC Output (Discharging)	1,800 W continuous, 120 V, 60 Hz, 3,600 W surge
AC Charging	1,440 W Max., 120 V, 60 Hz
DC Charging (XT60)	1,000 W Max., 12 V to 60 V, 20 A Max
AC + DC Charging	2,200 W Max.

BlueCell 200 - Optional

Battery Capacity	2,016 Wh
Battery Type	LiFePO ₄
Net Weight	About 17.3 kg/37.9 lbs
Dimensions (L × W × H)	580 × 350 × 75 mm* / 22.83 × 13.78 × 2.95 in
Charging Temperature	0°C to 40°C / 32°F to 104°F
Discharging Temperature	-20°C to 40°C / -4°F to 104°F
USB-C Port	5 V/3 A, 9 V/2 A, 12 V/1.5 A
Charging Current	75 A Max.
2 × Expansion Port	19.2 V, 75 A Max.

Display 1 - Optional

Mounting	Magnetic / Stand
Capacity	2,000 mAh
Dimensions (L × W × H)	110 × 77 × 15 mm / 4.33 × 3.03 × 0.59 in
Weight	155 g



US



Contact Us

*75 mm body (78 mm with foot pads)